

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 August 2001 (16.08.2001)


PCT

(10) International Publication Number  
**WO 01/58741 A1**

- (51) International Patent Classification<sup>7</sup>: **B62D 29/00**, 25/04
- (21) International Application Number: PCT/US01/01648
- (22) International Filing Date: 18 January 2001 (18.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/502,686 11 February 2000 (11.02.2000) US  
09/655,965 6 September 2000 (06.09.2000) US
- (71) Applicant: **L & L PRODUCTS, INC.** [US/US]: 160 McLean Drive, Romeo, MI 48065 (US).
- (72) Inventors: **BARZ, William, J.**; 5455 Marsh View Court #46, Shelby, Township, MI 48316 (US). **COON, Thomas, L.**; 3284 Merwin, Lapeer, MI 48446 (US). **CZAPLICKI, Michael, J.**; 1035 Pointe Place, Rochester, MI 48307 (US).
- (74) Agent: **DOBRUSIN, Eric, M.**; Dobrusin, Darden, Thenisch & Lorenz PC, Suite 311, 401 South Old Woodward Avenue, Birmingham, MI 48009 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: STRUCTURAL REINFORCEMENT SYSTEM FOR AUTOMOTIVE VEHICLES

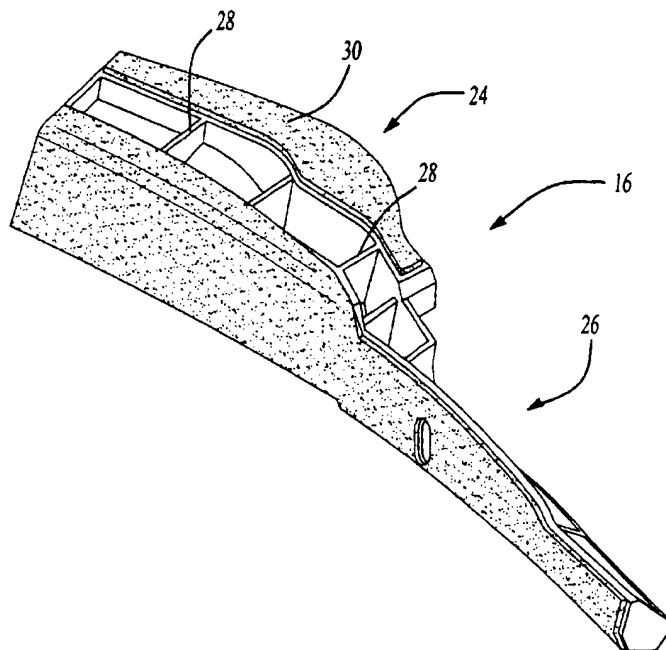

(57) Abstract: An automotive vehicle frame reinforcement system has a skeleton member (16) designed to be placed in a cavity defined in a vehicle frame, such as a roof or pillar section. An expandable material (30), such as an epoxy-based reinforcing foam, is disposed on the skeleton member (16). Once the system is attached to the frame, the foam expands and cures during an automobile assembly operation, bonding the reinforcement system to the frame. As a result, the reinforcement system provides enhanced load distribution over the vehicle frame without adding excessive weight.

WO 01/58741 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## STRUCTURAL REINFORCEMENT SYSTEM FOR AUTOMOTIVE VEHICLES

### FIELD OF THE INVENTION

5        The present invention relates generally to a reinforced structural member for use in strengthening the stiffness and strength of a frame assembly. More particularly, the invention relates to a vehicle frame system of an automotive vehicle that is reinforced by a member coated over a portion of its surface with an expandable material, the combination of which increases the structural stiffness and  
10    strength of the automotive vehicle.

### BACKGROUND OF THE INVENTION

For many years the transportation industry has been concerned with designing reinforced structural members that do not add significantly to the weight of  
15    a vehicle. United States Patent Nos. 5,755,486; 4,901,500; and 4,751,249 described prior art reinforcing devices. While these prior art devices may be advantageous in some circumstances, there is needed a simple low cost structure that permits coupling the reinforcement member to a variety of structures of varying geometric configurations. In the automotive industry there is also a need for a relatively low  
20    cost system for reinforcing automotive vehicle frame structures.

### SUMMARY OF THE INVENTION

The present invention is directed to a structural reinforcement system, and particularly one for reinforcing automotive vehicle frame structures, such as (without limitation) vehicle roof and pillar structures. The system generally employs a  
25    skeleton member adapted for stiffening the structure to be reinforced and helping to redirect applied loads. In use, the skeleton member is in contact, over at least a portion of its outer surface, with an energy absorbing medium, and particularly heat activated bonding material. In a particular preferred embodiment, the skeleton member is a molded metal, or composite frame and it is at least partially coated with  
30    foamable epoxy-based resin, such as L5206, L5207, L5208 or L5209 structural foam commercially available from L & L Products of Romeo, Michigan.

In one embodiment the skeleton member along with a suitable amount of bonding or load transfer medium is placed in a cavity defined within an automotive vehicle, such as a vehicle roof structure, pillar structure or both. The bonding

medium is activated to accomplish expansion of the resin in the space defined between the skeleton member and the wall structure defining the cavity. The resulting structure includes the wall structure joined to the skeleton member with the aid of the structural foam.

5

#### DETAILED DESCRIPTION OF THE DRAWINGS

The features and inventive aspects of the present invention will become more apparent upon reading the following detailed description, claims, and drawings, of which the following is a brief description:

10        Fig. 1 is a perspective view of aspects of an automotive vehicle roof and pillar structure, illustrating an A-Pillar and B-Pillar.

Fig. 2 is a perspective view of a skeleton member coated with an expandable resin in accordance with the present inventions.

Fig. 3 is another perspective view of the structure shown in Fig. 2.

15        Fig. 4 is a sectional view showing a coated skeleton member prior to activation of an expandable resin.

Fig. 5 illustrates the structure of Fig. 4 after the expandable resin has been expanded.

20        Fig. 6 is a perspective view of another illustrative structure in accordance with the present invention.

Fig. 7 is a side elevation view of the structure of Fig. 6.

Fig. 8 illustrates yet another structure in accordance with the present invention.

25        Fig. 9 illustrates the structure of Fig. 8 employed combination with a vehicle pillar structure.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

Fig. 1 illustrates an example of an automotive vehicle 10 showing portions of a frame structure. As will be appreciated, it is common for such structures to include a plurality of hollow vehicle frame members that are joined to define the frame. One such structure, for purposes of illustration (without limitation) is a vehicle roof and pillar structure. As will be recognized, included in the roof and pillar structure may also be windows, sunroofs or other removable tops, vehicle doors and door components, headliners (with or without overhead accessories), or the like. As discussed later, other vehicle frame members are also contemplated within the scope of the present invention.

While Fig. 1 illustrates an A-Pillar 12 and B-Pillar 14, other pillars may likewise be employed in accordance with the present invention. In Fig. 1 there is shown also a portion of the roof structure that bridges the A-Pillar 12 and B-Pillar 14.

Depending upon vehicle design, it is possible that the roof structure bridging the A-Pillar and B-Pillar is relatively indistinguishable between the A-Pillar and B-Pillar such that the A-Pillar structure and B-Pillar structure effectively adjoin one another. In such instances the uppermost portion of the pillar structure is deemed the roof structure.

Reinforcement of the roof and pillar sections is accomplished by locating one or more skeleton members in accordance with the present invention in a hollow or cavity portion of the roof or pillar. Fig. 1 illustrates examples of this by showing a first member 16, a second member 18 and a third member 20 in such locations. The members 16, 18 and 20 preferably are sealingly secured to at least one of the roof and pillar sections by a bonding material, which upon heat activation produces adhesion to skeleton members to help secure the members and the walls defining the hollow from movement within the hollow portion.

Though other heat activated materials are possible, a preferred heat activated material is an expandable plastic, and preferably one that is foamable. A particularly preferred material is an epoxy-based structural foam. For example, without limitation, in one embodiment, the structural foam is an epoxy-based material, including an ethylene copolymer or terpolymer that may possess an alpha-olefin. As a copolymer or terpolymer, the polymer is composed of two or three different monomers, i.e., small molecules with high chemical reactivity that are capable of linking up with similar molecules.

A number of epoxy-based structural reinforcing foams are known in the art and may also be used to produce the structural foam. A typical structural foam includes a polymeric base material, such as an epoxy resin or ethylene-based polymer which, when compounded with appropriate ingredients (typically a blowing and curing agent), expands and cures in a reliable and predictable manner upon the application of heat or the occurrence of a particular ambient condition. From a chemical standpoint for a thermally-activated material, the structural foam is usually initially processed as a flowable thermoplastic material before curing. It will cross-link upon curing, which makes the material incapable of further flow.

An example of a preferred structural foam formulation is an epoxy-based material that is commercially available from L&L Products of Romeo, Michigan, under the designations L5206, L5207, L5208 and L5209. One advantage of the preferred structural foam materials over prior art materials is that the preferred materials can be processed in several ways. The preferred materials can be processed by injection molding, extrusion compression molding or with a mini-applicator. This enables the formation and creation of part designs that exceed the capability of most prior art materials. In one preferred embodiment, the structural foam (in its uncured state) generally is dry or relatively free of tack to the touch.

While the preferred materials for fabricating the structural foam have been disclosed, the structural foam can be formed of other materials provided that the material selected is heat-activated or otherwise activated by an ambient condition (e.g. moisture, pressure, time or the like) and cures in a predictable and reliable manner under appropriate conditions for the selected application. One such material is the epoxy based resin disclosed in U.S. Patent Application Serial No. 09/268,810, the teachings of which are incorporated herein by reference, filed with the United States Patent and Trademark Office on March 8, 1999 by the assignee of this application. Some other possible materials include, but are not limited to, polyolefin materials, copolymers and terpolymers with at least one monomer type an alpha-olefin, phenol/formaldehyde materials, phenoxy materials, and polyurethane materials with high glass transition temperatures. See also, U.S. Patent Nos. 5,766,719; 5,755,486; 5,575,526; and 5,932,680, (incorporated by reference). In general, the desired characteristics of the structural foam include relatively high stiffness, high strength, high glass transition temperature (typically greater than 70 degrees Celsius), and good corrosion resistance properties. In this manner, the

material does not generally interfere with the materials systems employed by automobile manufacturers.

In applications where a heat activated, thermally expanding material is employed, an important consideration involved with the selection and formulation of the material comprising the structural foam is the temperature at which a material reaction or expansion, and possibly curing, will take place. For instance, in most applications, it is undesirable for the material to be reactive at room temperature or otherwise at the ambient temperature in a production line environment. More typically, the structural foam becomes reactive at higher processing temperatures, such as those encountered in an automobile assembly plant, when the foam is processed along with the automobile components at elevated temperatures or at higher applied energy levels, e.g., during painting preparation steps. While temperatures encountered in an automobile assembly operation may be in the range of about 148.89° C to 204.44°C (about 300°F to 400°F), body and paint shop applications are commonly about 93.33°C (about 200°F) or slightly higher. If needed, blowing agent activators can be incorporated into the composition to cause expansion at different temperatures outside the above ranges.

Generally, suitable expandable foams have a range of expansion ranging from approximately 0 to over 1000 percent. The level of expansion of the structural foam 14 may be increased to as high as 1500 percent or more. Typically, strength is obtained from products that possess low expansion.

Referring now to Fig. 2, there is shown one example of a first reinforcement member 16 in accordance with the present invention. This illustrated embodiment is useful, for instance, for reinforcing the juncture between an automotive vehicle roof 22 and the A-Pillar. The first member 16 has a first portion 24 adapted for placement in a cavity defined in a vehicle roof structure, and a second portion 26 adapted for placement in a cavity defined in a vehicle pillar, such as an A-Pillar as illustrated. Preferably the cross sectional silhouette of both the first portion 24 and the second portion 26 is generally complementary to the walls of the cavity defined in opposing roof or pillar structure. Though the member may also be solid, the member preferably includes a skeleton frame that is prepared to minimize weight while still achieving desired rigidity. Accordingly, the skeleton frame preferably is designed to employ a plurality of ribs that effectively are beamlike (e.g. I-beam) in function, thus helping to selectively strengthen the member. The ribs are illustrated in Fig 2 and 3

generally running orthogonal to one another. However, this is not intended as limiting, as the rib configuration may be varied depending upon the desired outcome.

In general, however, a rib is placed adjacent to, and in generally non-parallel relationship to a surface over which loads will be distributed. In Fig. 2, by way of illustration, a plurality of first ribs 28 are located adjacent to a surface of the member (shown covered with expandable material 30). Fig 3 also shows how the ribs 28 (reference numerals illustrating some of the ribs, but not all) can be configured relative to one another to provide additional stabilization. In general, because of the relatively high bending moment of the ribs, without unduly increasing weight of the member, rigidity can be increased in locations where loads are anticipated by selective design and placement of the ribs. At the same time, enhanced load distribution is possible from the continuous surfaces and foam employed with the ribs to spread energy. Moreover, weight savings can be achieved by such design. For instance, the structure of the member is also such that over at least one quarter, preferably one half and more preferably greater than about three quarter of the length of the member at any given point between the ends of said member, the cross-sectional area of the member is less than 75%, more preferably less than 50% and still more preferably less than 20% of the overall area for a silhouette profile taken such point. In this manner, weight reductions of up to about 50%, more preferably about 70%, and still more preferably about 90%, are possible as compared with a solid structure of the same material.

It should be appreciated that other devices for securing the members 16, 18, and 20 to the vehicle frame may be employed, including suitable fasteners, straps, or other mechanical interlocks. Through-holes 32 may also be defined within the structure to assist in vehicle manufacturing. In a particularly preferred embodiment, the skeleton members of the present invention are injection molded plastics, such as nylons. However, other materials and manufacturing techniques may be employed similarly to achieve like results. For instance, high strength to weight metal components, such as aluminum, titanium, magnesium or the like, may be employed, as well as polymer composites such as a layered polymer with fibers capable of compression molding to generate strength.

Returning to Fig. 1, when employed in an automotive vehicle in accordance with the present invention, the skeleton members, particularly when coated with an expandable material (such as a heat activated epoxy based foam) can reinforce the



region for which it is used by the combination of increased stiffening from the presence of beam-like ribs and load distribution through the combination of relatively high surface area continuous surfaces and an expandable material.

In another preferred embodiment, the expandable material, upon expansion  
5 will serve as a sealant for blocking the passage of fluids or other elements through the cavity. Thus, in such embodiment, it is preferred that the expandable material is provided continuously about generally the entirety of the periphery of any portion of the skeleton member that does not sealingly contact the automobile frame structure. Fig. 5 illustrates this by showing how skeleton member 16 coated with an  
10 expandable material 30 (shown in Fig. 4) is sealed in place upon activation of the material 30 (shown expanded in Fig. 5).

Figs. 6 through 9 illustrate other embodiments in accordance with the present invention. In Figs. 6 and 7, there is shown a reinforcement member 18 adapted for a pillar of an automotive vehicle. The structure of the skeleton member employs a  
15 plurality of ribs 34 adjoining one or more continuous surfaces 36 (shown coated with an expandable material 38).

The expandable material is shown in its expanded state. As the skilled artisan will appreciate, not all ribs are shown, and the specific design of each rib configuration will vary depending upon its intended use, and the geometry of the  
20 region being reinforced (e.g. walls 40 and 42 of the vehicle frame structure defining the cavity). Further expandable material may be employed in contact with the ribs.

Figs. 8 and 9 illustrate yet another embodiment according to the present invention. In this embodiment, a skeleton member 20 having a plurality ribs 44 and generally continuous surfaces (shown coated with a layer 46) is fabricated to also  
25 include structure for facilitating vehicle manufacture. Specifically, the embodiment shown includes a plurality of through-holes 48, for enabling body shop weld access or the like. As shown in Fig. 9, in this embodiment, the expandable material layer 46, upon expansion, covers the circumference of a cross section of the structure.

The skilled artisan will appreciate that the use of the reinforcements disclosed  
30 herein is not intended as being limited only to illustrate the locations shown in Fig 1. They can be used in any location within an automotive vehicle frame. For instance, other reinforced locations are also possible including but not limited to pillar to door regions, roof to pillar, mid-pillar, roof rails, windshield or other window frames, deck lids, hatches, removable top to roof locations, other vehicle beltline locations, motor

rails, lower sills, cross members, lower rails, and the like. Moreover, vehicle roof tops may be reinforced to support additional loads in accordance with the present invention. In the same manner as was described above in the context of a roof and pillar system, a reinforcement frame member having an expandable material thereon  
5 is placed in a cavity defined in the vehicle frame structure. The material is expanded to help secure the reinforcement in place.

The preferred embodiment of the present invention has been disclosed. A person of ordinary skill in the art would realize however, that certain notifications would come within the teachings of this invention. Therefore, the following claims  
10 should be studied to determine the true scope and content of the invention.

## CLAIMS

## WHAT IS CLAIMED IS:

1. A system for reinforcement of an automotive vehicle frame, comprising:
  - (a) a skeleton member having a plurality of reinforcing ribs5 incorporated therein adapted for placement in a cavity defined in an automotive vehicle frame; and
  - (b) an expandable material over at least a portion of said skeleton member.
- 10 2. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle roof.
3. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle pillar.
- 15 4. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle frame rail.
5. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle frame cross member.
- 20 6. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle window frame.
- 25 7. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle deck lid.
8. The system as claimed in claim 1, wherein said skeleton member is adapted for reinforcing a vehicle hatch.
- 30 9. A member for use in a system for reinforcement of an automotive vehicle frame in response to an external load, comprising:
  - (a) a first portion having a plurality of beam elements with a longitudinal axis generally non-parallel to the load; and

(b) a second portion contiguous with said first portion, the second portion having a surface adapted for carrying an expandable material, which upon expansion helps distribute load over said surface in response to said load.

5           10.    The member as claimed in claim 9, wherein said material is a polymeric material.

          11.    The member as claimed in claim 10, wherein said material is a polymeric foam.

10

          12.    The member as claimed in claim 9, wherein said expandable material is an epoxy-based polymer foam.

          13.    The member as claimed in claim 9, wherein said expandable material  
15 is a heat activated expandable polymer foam.

          14.    The member as claimed in claim 9, wherein said expandable material is an expandable plastic foam that is generally free of tack to the touch.

20           15.    The member as claimed in claim 9, wherein said expandable material is an expandable plastic foam that can be activated at a temperature encountered in an automotive vehicle paint operation.

          16.    A reinforced roof and pillar system for an automotive vehicle,  
25 comprising:

          (a)    an automotive vehicle frame for a roof and pillar of an automotive vehicle, said frame having a plurality of wall portions defining a cavity therein; and

          (b)    a skeleton member disposed within said cavity and having a structural foam material in sealing contact with said skeleton member and at least one of said  
30 plurality of wall portions.

          17.    The member as claimed in claim 16, wherein said expandable material is a polymer foam.



18. The member as claimed in claim 16, wherein said expandable material is an epoxy-based polymer foam.

19. The member as claimed in claim 16, wherein said expandable material  
5 is a heat activated expandable polymer foam.

20. The member as claimed in claim 16, wherein said expandable material is an expandable polymer foam that is generally free of tack to the touch.

10 21. The member as claimed in claim 16, wherein said expandable material is an expandable plastic foam that can be activated at a temperature encountered in an automotive vehicle paint operation.

1/4

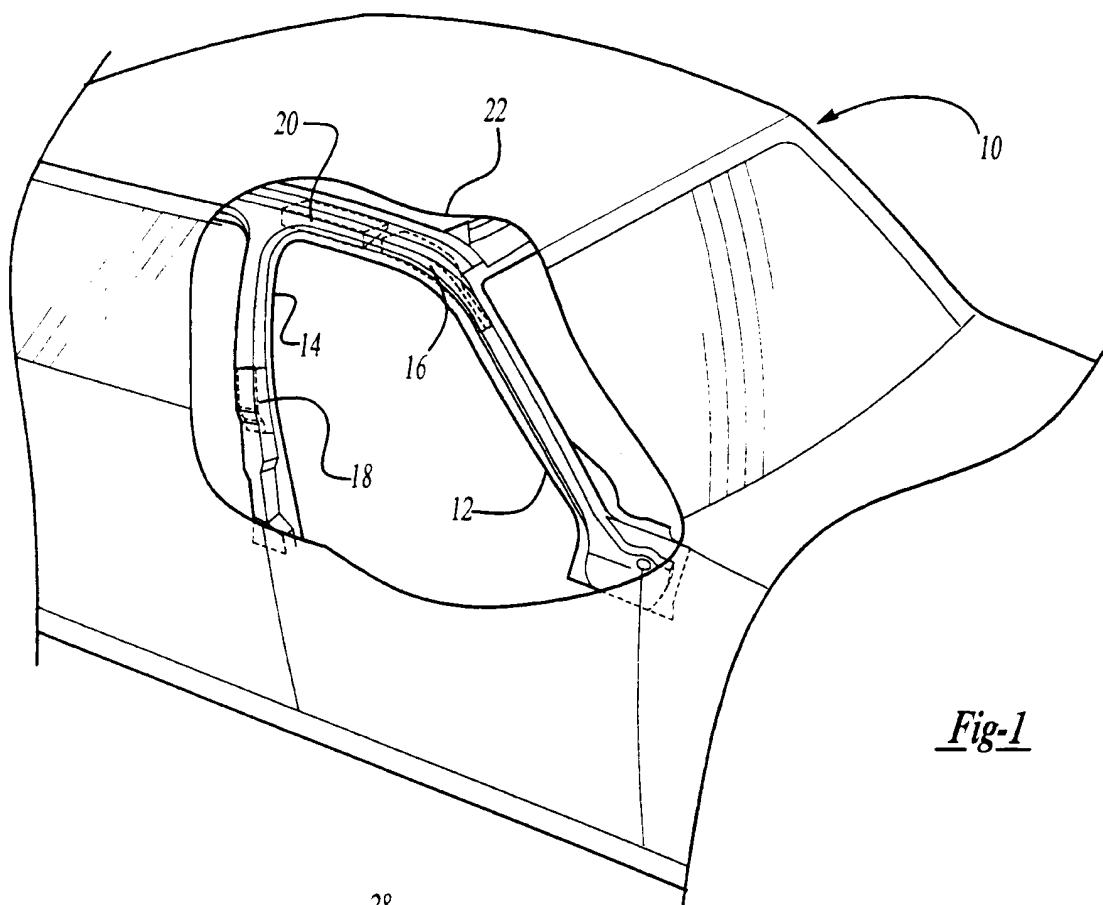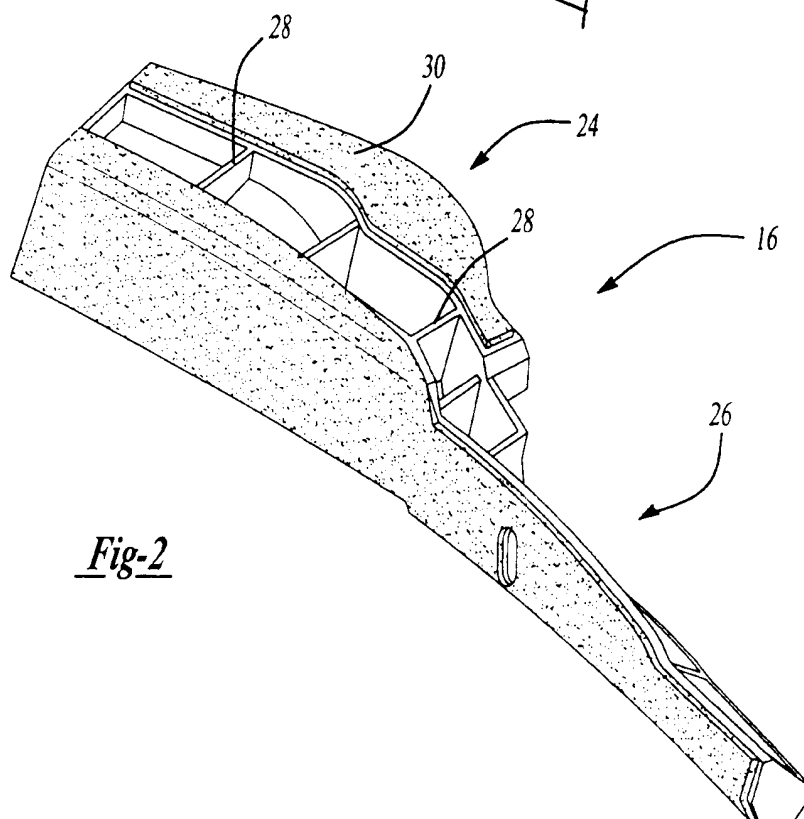Fig-1Fig-2

2/4

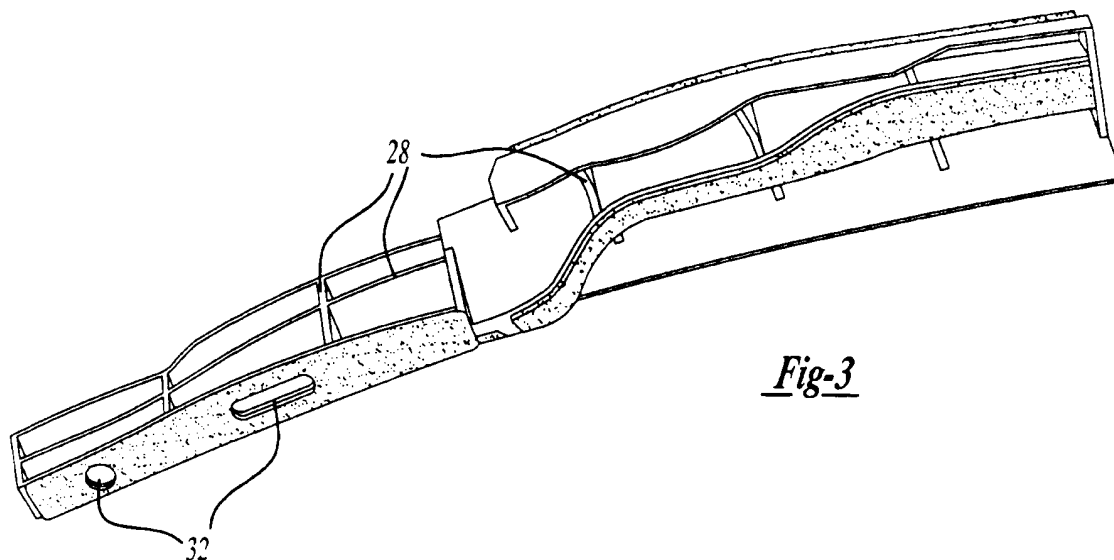


Fig-3

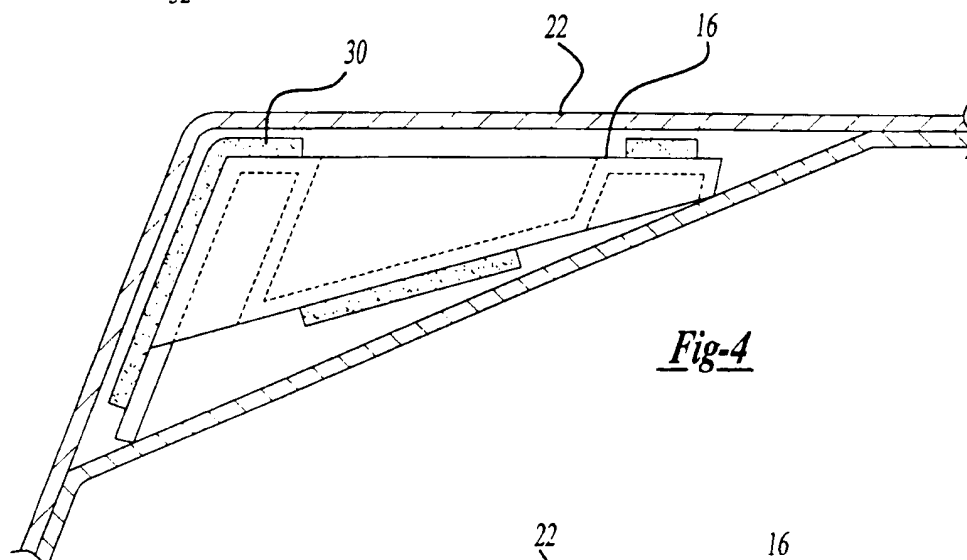


Fig-4



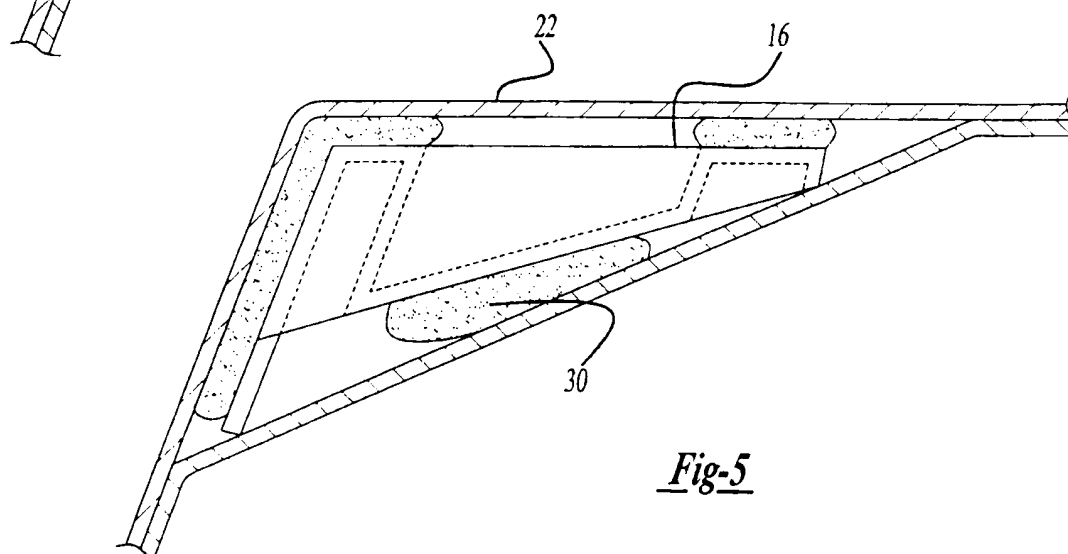


Fig-5

3/4

Fig-6Fig-7

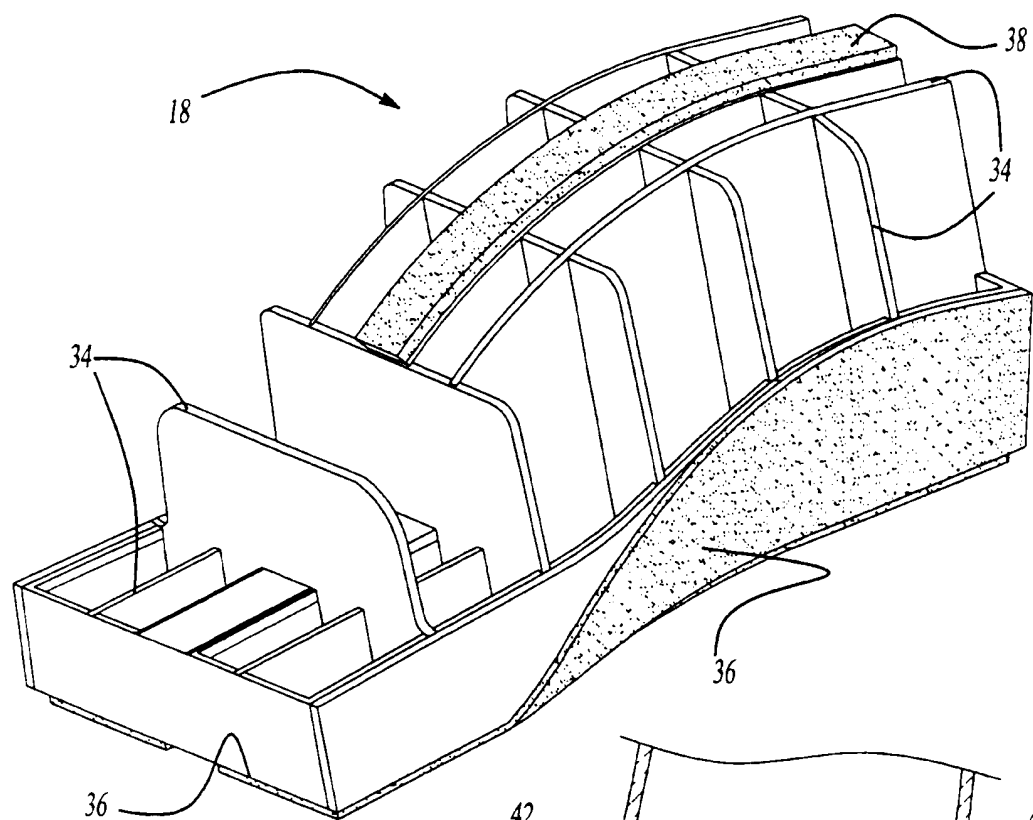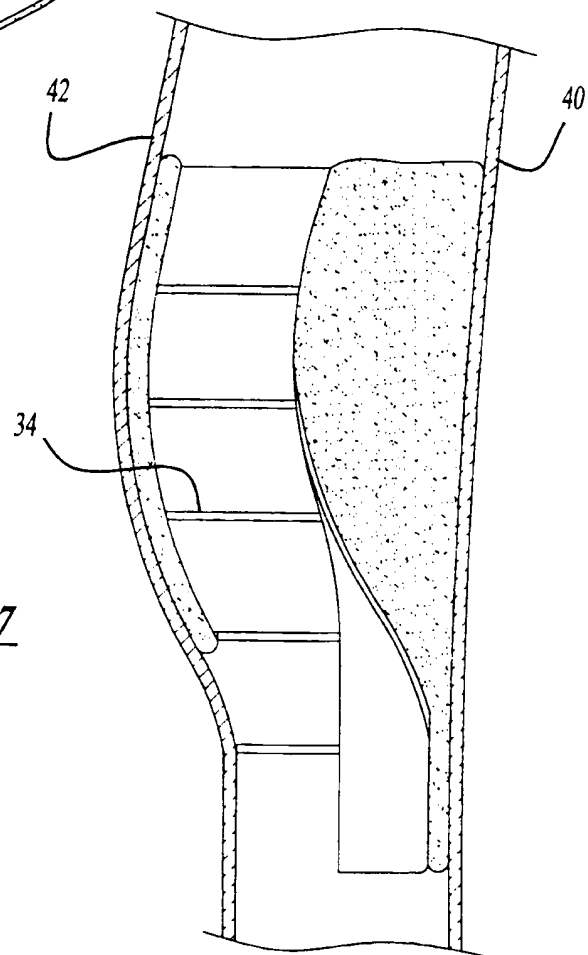

4/4

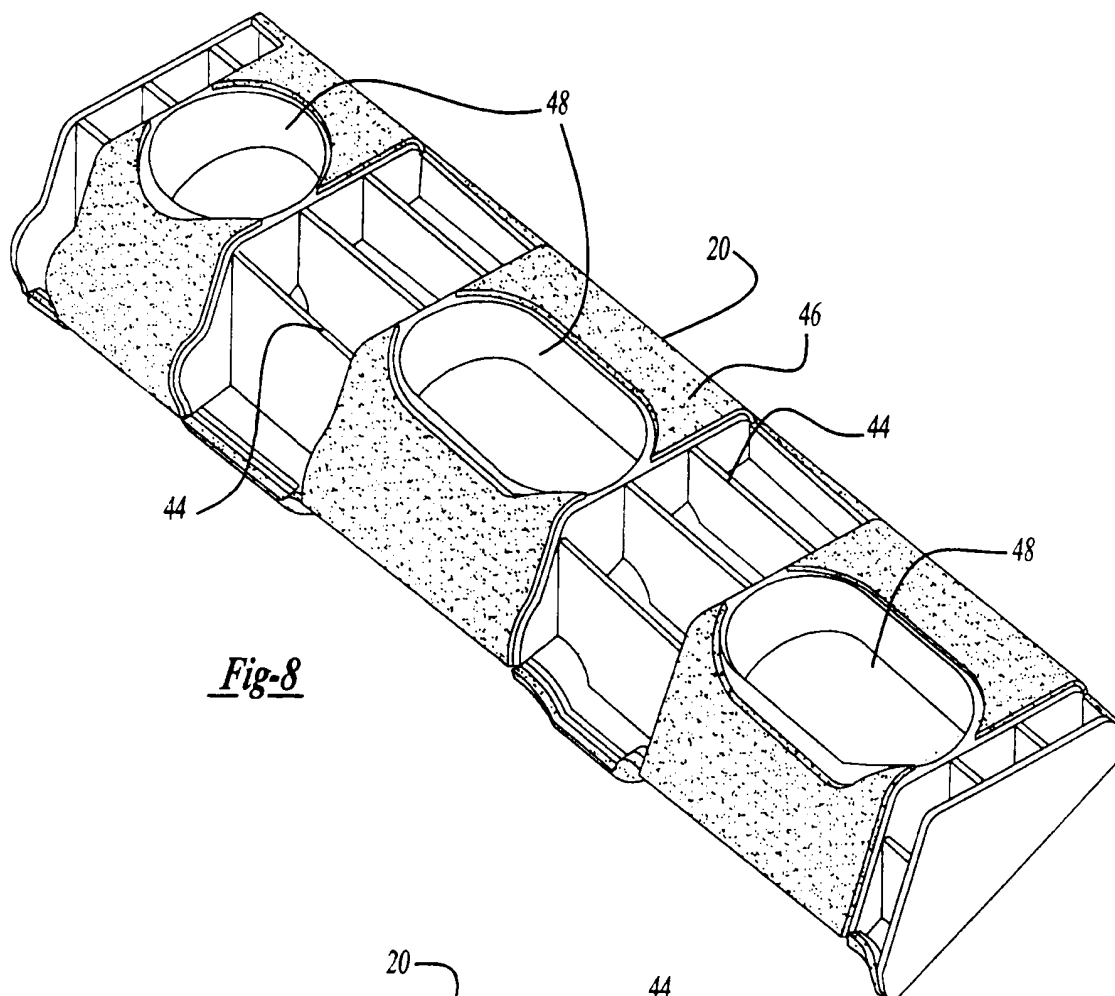


Fig-8

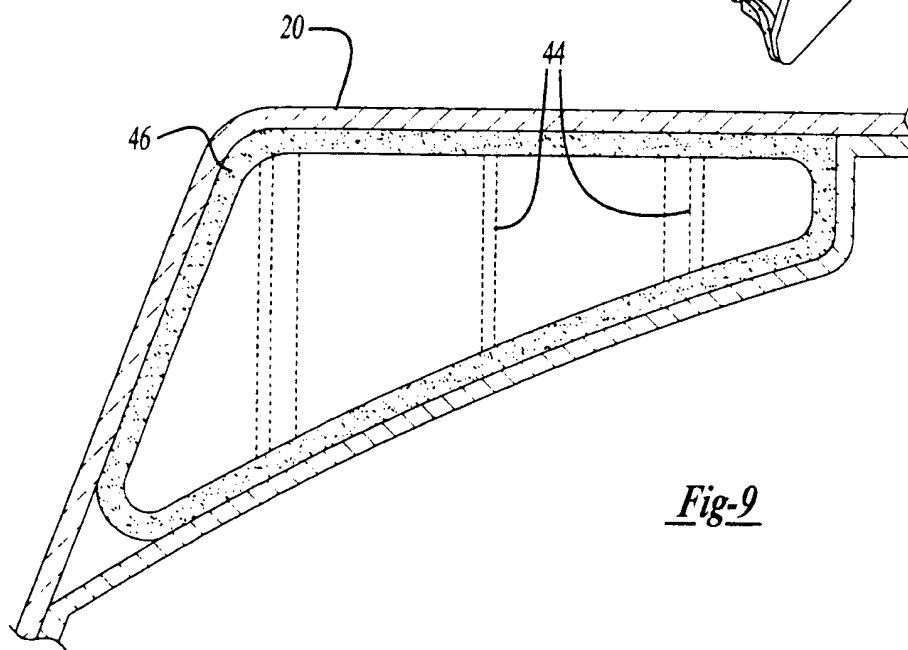


Fig-9

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/01648

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B62D29/00 B62D25/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 749 263 A (RENAULT) 5 December 1997 (1997-12-05) page 1, line 23 -page 3, line 28; figures 1-4	1,4,9,14
Y	---	2,3,5,8, 10-13, 15,16,20
Y	WO 99 64287 A (SCHNEIDER WOLF DIETER ;M I M HUETTENWERKE DUISBURG GM (DE)) 16 December 1999 (1999-12-16) claim 1; figures 1,2	2,3,5,8, 16,20
Y	---	
Y	US 5 992 923 A (WYCECH JOSEPH S) 30 November 1999 (1999-11-30) column 3, line 5-19; claim 1; figure 2	10,11, 13,15
A	---	17,19,21
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Δ\* document member of the same patent family

Date of the actual completion of the international search

17 April 2001

Date of mailing of the international search report

26/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Blondeau, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/01648

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 755 486 A (WYCECH JOSEPH S) 26 May 1998 (1998-05-26) column 5, line 31 -column 6, line 26	12
A	---	18
X	US 5 575 526 A (WYCECH JOSEPH S) 19 November 1996 (1996-11-19) column 7, line 24-28; claim 5; figure 11	16
A	---	15,21
A	US 5 213 391 A (TAKAGI MASAHIRO) 25 May 1993 (1993-05-25) column 3, line 4-23 column 5, line 18-26; figures 5-7	15,21
A	---	15,21
A	US 5 102 188 A (YAMANE YUKIO) 7 April 1992 (1992-04-07) column 5, line 57-68; figure 2 -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/01648

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2749263	A	05-12-1997	NONE	
WO 9964287	A	16-12-1999	DE 19825603 A DE 19848632 A AU 4604999 A EP 1086012 A	23-12-1999 30-03-2000 30-12-1999 28-03-2001
US 5992923	A	30-11-1999	AU 2100999 A BR 9910706 A EP 1082238 A WO 9961289 A	13-12-1999 30-01-2001 14-03-2001 02-12-1999
US 5755486	A	26-05-1998	AU 711241 B AU 5750596 A BR 9609162 A CA 2221126 A CZ 9703677 A EP 0827473 A HU 9900371 A JP 11505777 T PL 324907 A SI 9620084 A SK 157397 A WO 9637400 A	07-10-1999 11-12-1996 09-05-2000 28-11-1996 13-05-1998 11-03-1998 28-05-1999 25-05-1999 22-06-1998 30-06-1998 03-06-1998 28-11-1996
US 5575526	A	19-11-1996	AU 2544895 A BR 9507661 A CA 2189348 A CZ 9603372 A DE 758965 T EP 0758965 A ES 2148117 T JP 10500917 T PL 317261 A US 6168226 B WO 9532110 A US 5884960 A	18-12-1995 07-10-1997 30-11-1995 14-05-1997 22-10-1998 26-02-1997 16-10-2000 27-01-1998 01-04-1997 02-01-2001 30-11-1995 23-03-1999
US 5213391	A	25-05-1993	NONE	
US 5102188	A	07-04-1992	JP 2053157 C JP 2175475 A JP 7088175 B GB 2228455 A, B	10-05-1996 06-07-1990 27-09-1995 29-08-1990